



Lower Providence Township
 100 Parklane Drive • Eagleville, PA. 19403
 Phone: (610) 539-8020 • Fax: (610) 539-6347
www.lowerprovidence.org

RCC- _____
 Date Received: _____

APPLICATION FOR RESIDENTIAL CERTIFICATE OF COMPLIANCE

All information ***MUST*** be filled out completely.

Property Address to be inspected: _____

Current Use of Property: _____

Number of Existing Dwelling Units: _____ **Settlement Date:** _____

Current Property Owner: _____

Address: _____

Home Phone: _____ Work/Cell Phone: _____ E-mail: _____

Prospective Buyer: _____

Address: _____

Home Phone: _____ Work /Cell Phone: _____ E-mail: _____

Realtor: _____

Address: _____

Home Phone: _____ Work /Cell Phone: _____ E-mail: _____

In accordance with Ordinance Number 350, as Amended, we hereby apply for a Certificate of Compliance for the above referenced property.

The Applicant is responsible for scheduling the inspection with the Township. The Code Enforcement Department **MUST** have at least two (2) weeks notice prior to the inspection date.

CERTIFICATE EXPIRES NINETY (90) DAYS FROM DATE OF ISSUANCE

 Signature

Trash Certification Attached		
<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/> N/A

 Title (Owner, Buyer, Realtor)

FOR INTERNAL USE ONLY			
Inspection Date:		Time:	AM PM

LOWER PROVIDENCE TOWNSHIP CHECKLIST FOR RESIDENTIAL RESALE INSPECTIONS

In order to expedite the issuance of your Certificate of Compliance, please take the time to review the following items prior to inspection: **This list is provided as a courtesy, it is not all inclusive.**

1. Address (house numbers) must be visible from the street; numbers should be at least 4" high. If your mailbox is located on your side of the street you may have the numbers on both sides of the mailbox; or the number can be mounted directly onto the side of the house facing that street.
2. Do you have an alarm system? Is it registered with the Police Department?
3. Did you install a pool, utility shed, accessory building or structure, an addition, an alarm system, or finish your basement? If so, and you did not obtain a permit prior to the installation, you will be required to come to the Township Building and apply for one.
4. Smoke detectors are to be installed on each level of the house, including one in each sleeping room (also outside of each separate sleeping area in the immediate vicinity of the bedrooms) including the basement. In basements with doors at the top of the stairs, the detector should be installed at the bottom of the stairs. In all cases, avoid mounting the detector within one (1) foot of the wall if mounting on the ceiling.
5. **Sump pumps cannot be connected to the sewer line.** Pumps must discharge to the front or rear of your house, not to the sides - if you have a neighbor there. No drainage is to go to the street, as icing can occur in the winter months.
6. All electrical switches, outlets and junction boxes must have covers on them. All electric fixtures must be mounted. Any spliced wires must be placed in a junction box; no splices may be left exposed, all wiring must be mounted securely. Outside air conditioning units must have cutoff switches next to the unit. Service cables to your house meter, *if frayed*, must be replaced. All kitchens, counter top surfaces, bathrooms, and laundry areas, and outside outlets, or any outlet within six (6) feet of water **MUST** have GFCI outlets.
7. For electric, gas or oil fired water heaters and furnaces that heat water for baseboard or radiator heat, and blow down tube must be attached to the pressure and temperature relief valve to extend within within six (6) inches of the floor. (Refer to the diagram enclosed to this list.)
8. All plumbing is visually checked to make sure there are no leaks.
9. Stairways inside or out with four or more risers require guards on both sides and a handrail on at least one side, for the entire length of the stairway. Any porch, balcony or raised floor surfaces more than thirty (30) inches above the floor or grade shall have guards.
10. Any sidewalk or curb should be free of hazards. Any blocks that are raised in relation to one adjoining them may have to be replaced.
11. If you have an attached garage, the door between the garage and the house must be a solid wood door 1 3/8" thick (**panel doors do not meet this requirement**), metal doors, or hollow wooden doors with a galvanized plate of at least 26 gauge attached to it on the garage side, the entire length and width of the door, or a twenty (20) minute fire rated door. Doors with windows are not acceptable. Any garage wall adjoining the house, must be dry walled with at least 1/2" drywall taped and spackled, and all penetrations sealed. Any garage ceiling under living space must be done the same way using 5/8" drywall. If these are plastered, this is sufficient.
12. Replace any broken windows in the home and garage.
13. The recycle bin is a part of the property and **MUST** be left behind. J. P. Mascaro provides bins. They can be reached at 1-800-432-1616.
14. Check the exterior of the property and make sure that it is watertight.
15. Visual inspection of all walls, floors, ceilings and doors to make sure there are no holes.
16. Double cylinder (uses a key on the outside and inside) locks are not permitted on doors. Flip latches permit faster egress in case of an emergency, without a search for keys.


17. Check your clothes dryer hose. Plastic hoses must be replaced with a metal or flexible aluminum hose. Discharge must be vented to the outside of the house.
18. All residential resale applications for a Mobile Home must include a tax certification from the Lower Providence Township Tax office.
19. All doors with direct access to the pool through that wall shall be equipped with an alarm, which produces an audible warning when the door and its screen, if present, are opened. The alarm shall sound continuously for a minimum of 30 seconds immediately after the door is opened and be capable of being heard throughout the house during normal household activities. The alarm shall automatically reset under all conditions. The alarm system shall be equipped with a manual means, such as touchpad or switch, to temporarily deactivate the alarm for a single opening. Such deactivation shall last for not more than 15 seconds. The deactivation switch(es) shall be located at least 54 inches (1372 mm) above the threshold of the door.
20. Pedestrian access gates shall open outward away from the pool and shall be self-closing and have a self-latching device.
21. Where an above ground pool structure is used as a barrier or where the barrier is mounted on top of the pool structure, and the means of access is a ladder or steps, then:
 - a. The ladder or steps shall be capable of being secured, locked or removed to prevent access.

Contact the Township Code Department, regarding Resale Inspections at: (610)-539-8020.

Additional items may be noted at the inspection time, as required by The PA Uniform Construction Code. These items will be listed by the inspector.

RELIEF VALVE DISCHARGE

OPEN RELIEF VALVE PROHIBITED. IT PRESENTS THE DANGER OF SPRAYED HOT WATER TO PEOPLE IN THE IMMEDIATE AREA.

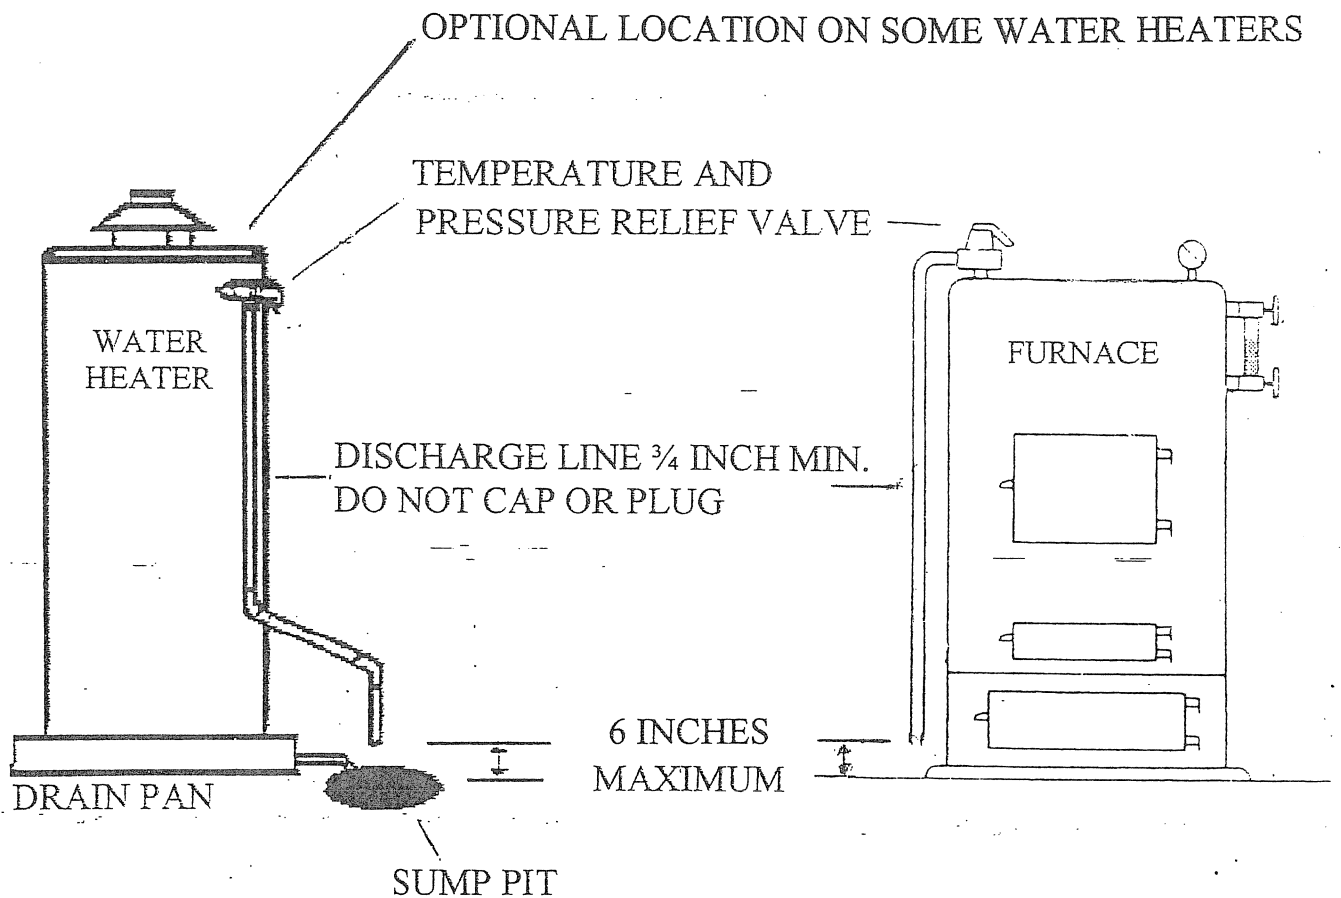

RELIEF VALVE MUST BE PIPED TO WITHIN SIX INCHES OF THE FLOOR, FRENCH DRAIN OR SUMP PIT.